

# HEAVY DUTY CONCEALED HINGE

J95




Max. Door Weight : **25 kg** with 2 pcs, **40 kg** with 3 pcs.

You can reduce the time spending over construction and installation since you don't need to install as many as regular concealed hinges. It can be used for heavy door applications such as big cabinets in houses or stores.

Normal Concealed Hinges  
(5 pcs used)

J95  
(2 pcs used)

The Number of Necessary Hinges with Door Dimensions

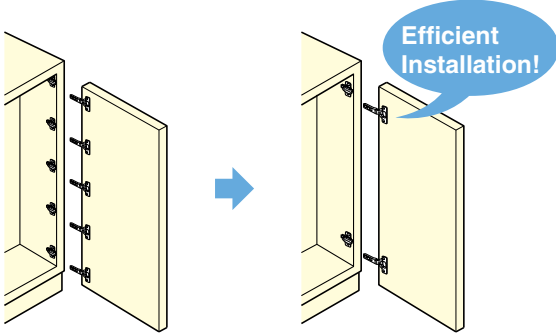

HINGES

## Simple Installation and Detachment by One-Touch





## Flat Design

## Easy and Fast Adjustment

Door can be adjusted by turning adjustment screws.


• How to Install

• How to Release




HEAVY DUTY CONCEALED HINGE / MOUNTING PLATE

Overlay Adjustment (Horizontal Adjustment)




+0 mm, -4 mm

Vertical Adjustment




±3 mm

Depth Adjustment



+1.5 mm, -2.5 mm

Tilting Adjustment



Tilting adjustment can be done by using these three ways of adjustments.

## For One-Touch Sliding Hinge for Heavy Doors J95 Series



TAP518



CAD	Item Code	Item Name	Material	Finish
-	160-032-356	TAP518NI	Steel	Nickel
-	160-043-496	TAP518BN		Black Nickel

## MOUNTING PLATE

J95-P6T



**Features**

- Depth adjustment : + 1.5 -2.5 mm
- Vertical adjustment : ± 3 mm
- Overlay distance adjustment : + 0, - 4 mm
- Thickness: 0 mm (Standard)

**Recommended Screw**

Size 5 raised countersunk head tapping screw or wood screw.

Item Code	Item Name	Material	Finish	Weight	Carton
160-026-732	J95-P6T	Steel/Zinc Alloy (ZDC)	Nickel	94 g	100 pcs
160-034-927	J95-P6T BN		Black Nickel	94 g	100 pcs