



## STAINLESS STEEL LEVER LATCH








**LL-66S** 



## **Cut Out Dimensions**








## **Features**

- Made entirely out of SUS316 or its equivalent. Very high corrosion resistance.
- Heat-resistant
- Can be used on overlay doors or flap doors where the door is longer than the frame's height.
- · Removes the need for handles or pulls.
- · High resistance to vibrations from movement or from earthquakes.
- Installation position can be adjusted (Body: vertically ±1.5mm. Counter plate: horizontally ±1.5mm)
- · Can be used in exterior applications.

## Parts Included

Truss head tapping screw 4×12 (SUS)

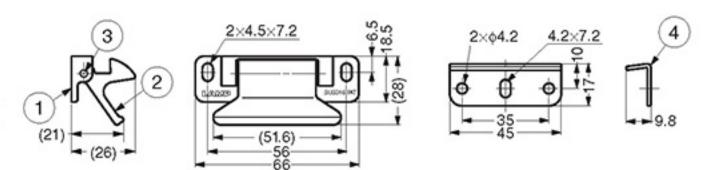

No.	Part Name	Material	Finish Mirror Mirror	
0	Latch Body	Stainless Steel (SCS14)		
@	Lever	Stainless Steel (SCS14)		
3	Shaft	Shaft Stainless Steel (SUS316)		
<b>(4)</b>	Counter Plate	ounter Plate Stainless Steel (SUS316)		

\*SCS14 is equivalent of SUS316.

Item Code	Item Name	Retaining Force N	Retaining Force kgf	Weight	Box	Carton
140-051-030	LL-66S	196 N	20 kgf	85 g	20 pcs	100 pcs