


ADJUSTABLE TABLE LEG








Application Example

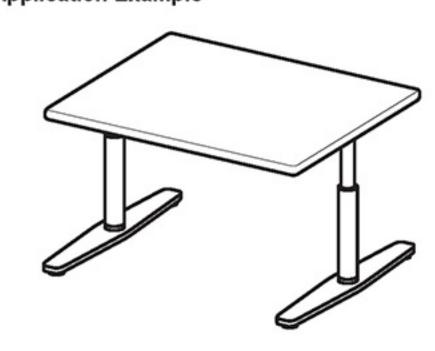

How to Raise and Lower

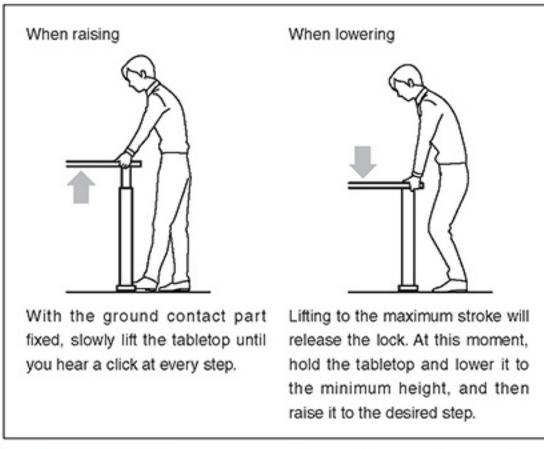

RTL-KUS

Features

- · Height can easily be adjusted by hand.
- Recommended for workbenches. Also recommended for tables that promote accessibility and universal design.
- . Mark on inner pipe is an indicator to help with height alignment.
- Recommended to use 2 4 pcs on surfaces over 900 mm so that surface is flat and not angled after height adjustment.
- Please contact us for options about changes to stroke, height and colour.
 For changes to diameter, shape or load capacity, please consult us.
- Models that can be supported on a single leg with a base or have separate height fixing functions are available by special order.


Remarks

- . The table surface will tilt during height adjustment.
- The tabletop must be supported with hands while the height is being lowered.
- The space between the legs should be 900 mm or less.
- In cases where the distance is large, there is a possibility that loads that place unequal weights on different sides can cause the table to become unstable.

For these cases, please reinforce the table legs and increase their rigidity.

Others

- Change to stroke, pitch and pipe colour is possible. For diameter, shape and load capacity change, please consult us.
- Oil adhered to the inner pipe will decrease the friction at the time of descent.Besides, if the lower movement is not so smooth, wipe the inner pipe gently with a cloth containing a little industrial lubricating oil. Please gently wipe excessive oil (if any) with a clean cloth. Do not use oil that will react with urethane. This is because the inner pipe may come in contact with the urethane O-ring on the inside of the pipe. Also, inner pipe can be in contact with urethane O-ring inside of the product. Please use oil which is not affect urethane.

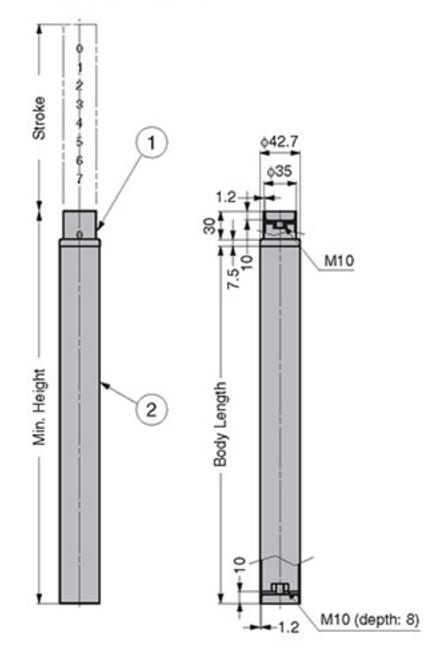

| No. | Part Name | Material | Finish / Colour |
|-----|-----------------|---------------|-----------------|
| 1 | Inner Pipe | Steel | Chrome |
| 2 | Body | Steel | Paint/Black |
| 3 | Top of the body | Polyamide(PA) | Black |

| CAD | Item Code | Item Name | Min. Height | Stroke | Body Length | Adjustable Pitch | Adjustable Steps | Load Capacity N/pc | Load Capacity kgf/pc | Weight (kg) | Box (pcs) | Carton (pcs) |
|---------------|-------------|------------|----------------|--------|----------------|---------------------|---------------------|-----------------------|-------------------------|-------------|-----------|-----------------|
| 2030 | 200-035-569 | RTL-KUS-5 | 320 | 100 | 282.5 | 20 | 5 | 400 | 40 | 0.86 | - | - |
| <u> 30</u> 30 | 200-035-570 | RTL-KUS-10 | 420 | 200 | 382.5 | | 10 | | | 1.1 | - 1 | _ |
| 20 ap | 200-035-571 | RTL-KUS-15 | 520 | 300 | 482.5 | | 15 | | | 1.35 | - | _ |

※Limited stock available. Please contact your vender.

