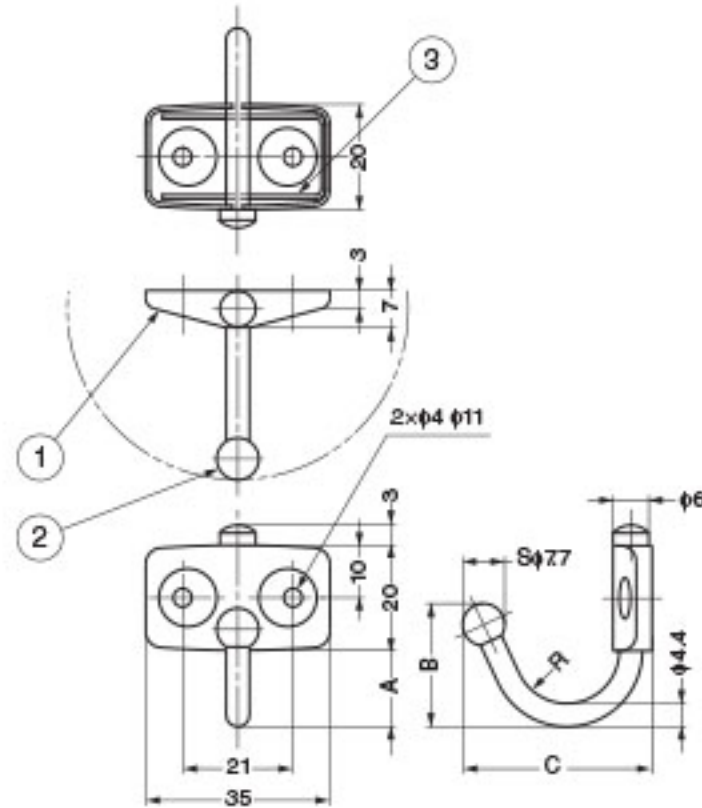


SWING HOOK

TEST
METHOD 4STAINLESS
304
STEELY
STAINLESS


TK, TKF

Features

- Hook can rotate 180°. Version with friction and without friction available.
- Friction type prevents unintended position adjustment due to vibrations.
- Hook has ball end, making it safer to use and preventing detachment.

Parts Included

Countersunk
head wood screw
3.5x20 (SUS)

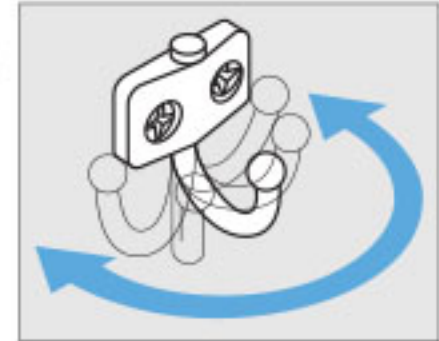

No.	Part Name	Material	Finish
①	Mounting Plate	Stainless Steel (SUS304)	Polished
②	Hook	Stainless Steel (SUS304)	Polished
③	Spring	Stainless Steel (SUS304WPB)	Plain

Item Code	Item Name	Type	Material	Finish	A	B	C	R	Load Capacity	Weight	Box	Carton	
110-020-250	TK-30	Without Friction	Stainless Steel (SUS304)	Polished	14.5	23.4	36	10	117.6 N	12 kgf	17 g	100 pcs	1000 pcs
110-020-254	TK-45	Without Friction	Stainless Steel (SUS304)	Polished	19.4	28.4	44.3	15	78.4 N	8 kgf	20 g	100 pcs	1000 pcs
110-020-018	TK-30F	With Friction	Stainless Steel (SUS304)	Polished	14.5	23.4	36	10	117.6 N	12 kgf	17 g	100 pcs	1000 pcs
110-020-019	TK-45F	With Friction	Stainless Steel (SUS304)	Polished	19.5	28.4	44.3	15	78.4 N	8 kgf	20 g	100 pcs	1000 pcs