

STAINLESS STEEL MINI SLIDE (FULL EXTENSION)



SCR3




Features

- Full extension (3 members).
- Ultra slim profile.
- Special inner member allows smooth movement.

Recommended Screws

- M2.6 low head screw (for A type)
- M2.6 screw (for B type)
- Max. screw length = Board thickness + 1.7 mm

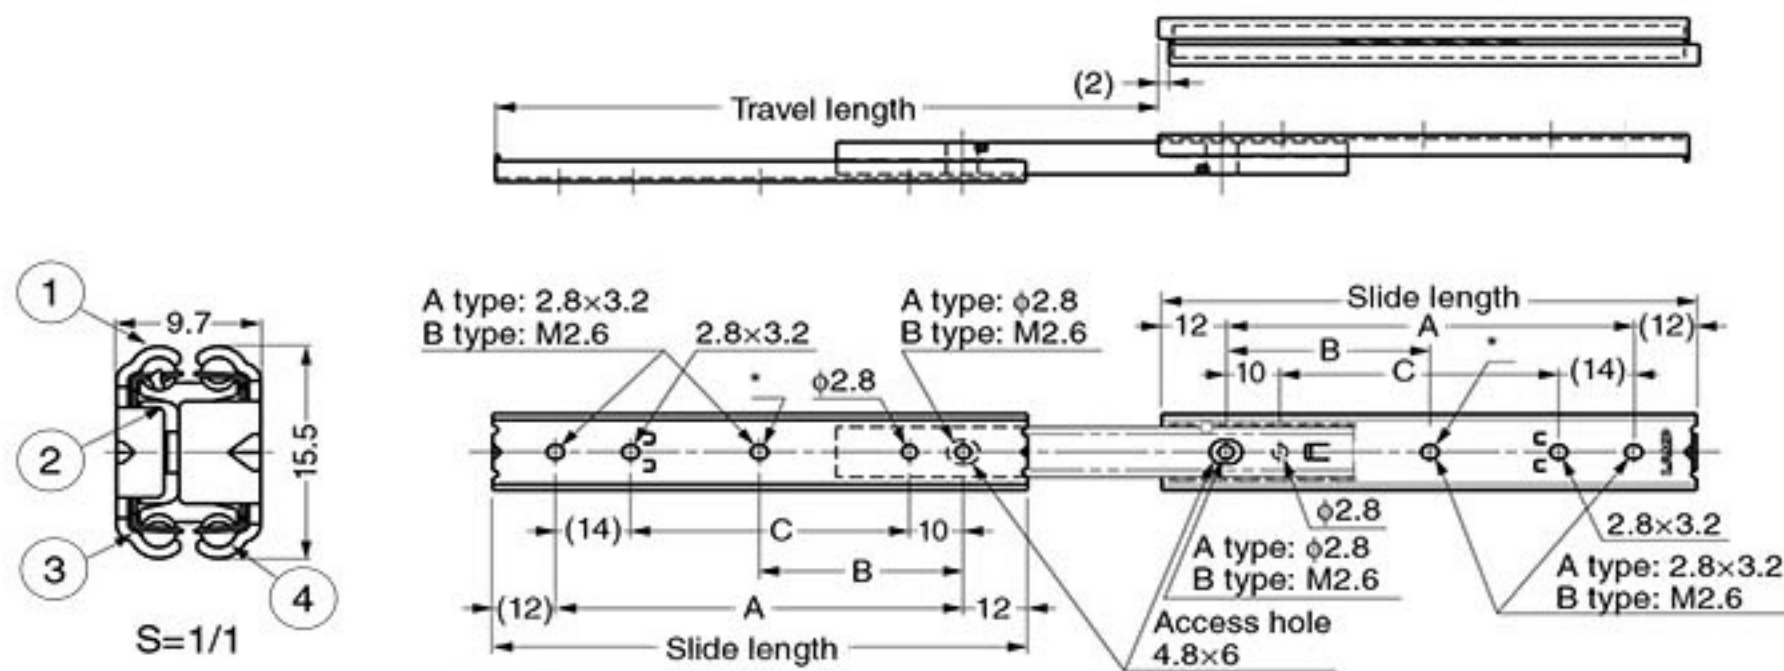

*No hole on 80 mm type.

No.	Part Name	Material
①	Outer Rail	Stainless Steel (SUS304)
②	Inner Rail	Stainless Steel (SUS304)
③	Retainer	Stainless Steel (SUS304)
④	Balls	Steel

Sold by piece.

Item Code	Item Name	Holes	Slide Length	Travel Length	A	B	C	Load Capacity		Weight	Box	Carton
								N	kgf			
190-026-614	SCR3-15- 80A	A Type	80	97	56	-	32	98 N/pair	10 kgf/pair	36 g	50 pcs	200 pcs
190-026-615	SCR3-15-100A	A Type	100	125	76	38	52	108 N/pair	11 kgf/pair	45 g	50 pcs	200 pcs
190-026-616	SCR3-15-150A	A Type	150	177	126	63	102	118 N/pair	12 kgf/pair	70 g	50 pcs	200 pcs
190-026-617	SCR3-15- 80B	B Type	80	97	56	-	32	98 N/pair	10 kgf/pair	36 g	50 pcs	200 pcs
190-026-618	SCR3-15-100B	B Type	100	125	76	38	52	108 N/pair	11 kgf/pair	45 g	50 pcs	200 pcs
190-026-619	SCR3-15-150B	B Type	150	177	126	63	102	118 N/pair	12 kgf/pair	70 g	50 pcs	200 pcs

